

> LED innovation, multifunction and autonomy (power supply on battery)

sirocco LED 24 000 lm




standard version



lighting data

Open core area lighting requirement (EN1838 standard)	1,000 m ² 10,763 ft ²
Very low risk area lighting requirement for safety and security (EN12464-2 standard)	230 m ² 2,475 ft ²
Light under the balloon (2 m high)	403 lx - 37 fc
Maximum lumen	24 600 lm
Colour temperature: neutral	4 750 K

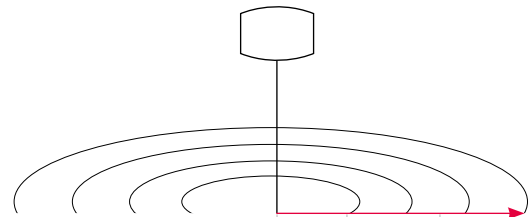

Radius	0	8,5 m 278 ft	18,5 m 606 ft
Surface	0	230 m ² 2,475 ft ²	1,000 m ² 10,763 ft ²
Standard	EN 12464-2 (5lx)		
	EN 1838 (0.5lx)		

How to read the drawing: in a range of 18,5 m - 606 ft, being a surface of 1 000 m² - 10,763 ft², we guarantee a lighting in accordance with the EN 1838 standard.

pro-pack version



technical data

Lamps	6 x 4 x 10 W LED			
Average lamp life*	40 000 h			
Efficiency	100 lm/W			
Type of lamp holder	10 W LED COB			
Maximum power	240 W			
Available voltage	48 VDC			
Dimmable	100 %	66 %	33 %	flash mode
Battery lifetime	4 h	6 h	12 h	8 h
Restrike time	instant			
Power supply	battery 13Ah-lithium 48 V			
Envelopes options	multiple envelope colours, without reflector or with reverse reflector			

* Under normal conditions of use

dimensions and packaging

Envelope size	ø 75 cm / h 60 cm ø 29 in / h 23 in
P400TA stand height	from 130 cm - 51 in to 410 cm - 161 in
Net weight of the balloon	3,7 kg - 8 lbs

Standard version : metallic case (integrated handle)

Case dimensions	L 60 x w 48 x h 22 cm L 23 x w 18 x h 8 in
Content: full set lighting balloon with LED (without stand), 2 batteries, 2 chargers, 1 user manual, 1 repair patch kit	
Net weight without stand	22 kg - 48 lbs

Pro-pack version (handle and wheels)

Case dimensions	L 143 x w 41 x h 27 cm L 56 x w 16 x h 10 in
Content: same as mettalic box + P400TA stand	
Net weight with stand	38 kg - 83 lbs

security

Flame-retardant fabric	
Silver internal reflector improving lumens below the balloon, increasing light to the work area and reduce light pollution	
Rain and dust proof material	IP54
Wind resistance of the balloon	80 km/h - 50 mph

AIRSTAR



www.airstar-light.com