

> a powerful lighting with a very good price-performance ratio

sirocco 1000 Redtech




NEW



> lighting data

Open core area lighting requirement (EN 1838 standard) *	4,071 m ² 43,820 ft ²
Very low risk area lighting requirement for safety and security (EN 12464-2 standard)	907 m ² 9,762 ft ²
Light under the balloon (4 m - 13,12 ft high) **	660 lx - 61 fc
Maximum lumen	99,000 lm
Colour temperature: daylight	5,000 K

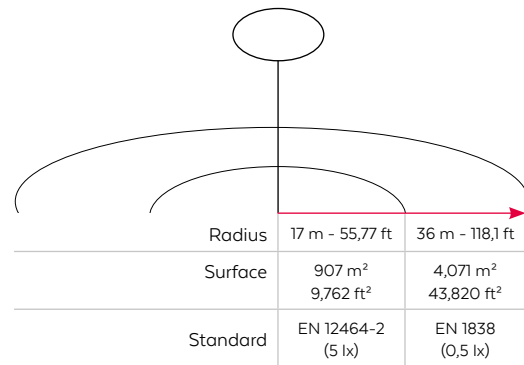

> technical data

Light Engine	Airstar LED Matrix : 18 x 5 500 lm
Average LED life*	50,000 h
Maximum power	700 W
Efficiency	141 lm/W 11 511 lm/kg - 5,221 lm/lbs
Available voltage	100-240 VAC / 50-60 Hz
Power supply	main power or 1,5 kVA generator
Envelopes options	multiple envelope colours, without reflector or with reverse reflector
Wind resistance of the balloon	100 km/h - 60 mph

Flame-retardant fabric

* Under normal conditions of use

> dimensions and packaging

Envelope size	ø 116 cm / h 64 cm ø 45 in / h 25 in
Net weight of the balloon	8,6 kg - 18 lbs
P500TA stand height	from 160 to 530 cm from 5 to 18 ft
Transport bag	L 108 x w 30 x h 30 cm L 42 x w 11 x h 11 in

Content: full set lighting balloon, 1 transport bag, 1 user's guide, 1 envelope repair kit. Stand and sand bags optional.

> Redtech

Certifications	IEC-60598-1, CE, IP54
Maximum Mesh range between two balloons	100 m - 109,3 yd
Smart Light Control	Airstar Light App

AIRSTAR LIGHT APP



* Standard Envelope. ** Lenticulare Envelope

aIRSTAR



www.airstar-light.com