

> 4 hours of battery life at 12 000 lumens

sirocco LED 12 000 lm



pro-pack version




dimensions and packaging

Envelope size	ø 60 cm / h 45 cm ø 23 in / h 17 in
Telescopic column height	up to 220 cm - 86 in
Net weight of the balloon	3 kg - 6,6 lbs
Pro-pack version (handle and wheels)	
Case dimensions	L 67 x w 51 x h 26 cm L 26 x w 20 x h 10 in
Content:	full set lighting balloon with telescopic column, 1 battery, 1 battery charger, 1 user manual, 1 repair kit
Net weight	20 kg - 44 lbs

lighting data

Open core area lighting requirement (EN 1838 standard)	700 m ² 7,534 ft ²
Very low risk area lighting requirement for safety and security (EN 12464-2 standard)	150 m ² 1,614 ft ²
Light under the balloon (2.5 m - 8 ft high)	200 lx - 18 fc
Maximum lumen	12 300 lm
Colour temperature: neutral	4 750 K

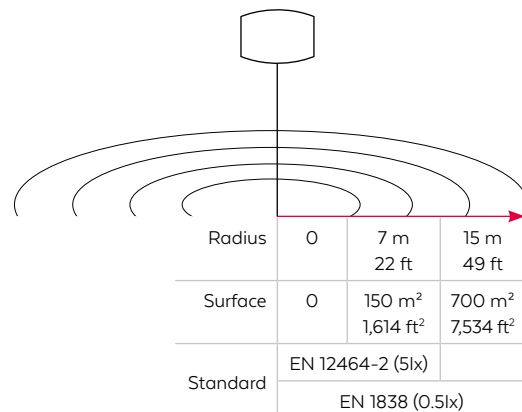

How to read the drawing: in a range of 15 m - 49 ft, being a surface of 700 m² - 7,534 ft², we guarantee a lighting in accordance with the EN 1838 standard.

technical data

Lamps	12 x 10 W LED			
Average LED life*	40 000 h			
Efficiency	100 lm/W			
Type of lamp holder	10 W LED COB			
Maximum power	125 W			
Available voltage	48 V DC			
Dimmable	100 %	66 %	33 %	flash mode
Battery lifetime	4 h	6 h	12 h	8 h
Restrike time	instant			
Power supply	battery 13Ah-lithium 48 V			
Envelopes options	multiple envelope colours, without reflector or with reverse reflector			

* Under normal conditions of use

security

Flame-retardant fabric	
Silver internal reflector improving lumens below the balloon, increasing light to the work area and reduce light pollution	
Rain and dust proof material	IP54
Wind resistance of the balloon	80 km/h - 50 mph