

> the smallest lighting device of the Sirocco range

Sirocco LED E27

standard version




dimensions and packaging

Envelope size	ø 60 cm / h 45 cm ø 23 in / h 17 in
P200CL stand height	up to 2 m - 6.5 ft
Net weight of the balloon	2,7 kg - 5,9 lbs
Metallic case (integrated handle)	
Case dimensions	L 58 x w 30 x h 22 cm L 22 x w 11 x h 8 in
Content: full set lighting balloon with stand, 1 user manual, 1 repair kit	
Net weight with stand	8 kg - 17,6 lbs
Options	
Can be mounted on the P350TA stand	
Requires 3 E27 optional lamps	

lighting data

Open core area lighting requirement (EN 1838 standard)	450 m ² 4,843 ft ²
Very low risk area lighting requirement for safety and security (EN 12464-2 standard)	90 m ² 968 ft ²
Light under the balloon (3 m - 9 ft high)	56 lx - 5,2 fc
Maximum lumen	7 500 lm
Colour temperature: warm	2 700 K

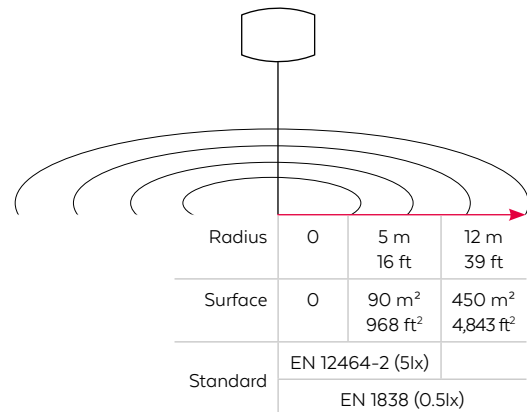

How to read the drawing: in a range of 12 m - 39 ft, being a surface of 450 m² - 4,843 ft², we guarantee a lighting in accordance with the EN 1838 standard.

technical data

Light Engine	3 E27 LED lamps 2 500 lm
Average LED life*	25 000 h
Efficiency	120 lm/W
Type of LED	E27
Power consumption	150 W
Available voltage	100-120-230 V / 50-60 Hz
Restrike time	instant
Power supply	main power
Envelopes options	white reflector available only

* Under normal conditions of use

security

Flame-retardant fabric

Silver internal reflector improving lumens below the balloon, increasing light to the work area and reduce light pollution

Rain and dust proof material IP54