



NEO PAD 6 x 4

Air



Technical data

Light source	LED RGBAwWcW
CCT	2800 K to 6500 K
CRI	96>98
TCLI	98+
LED lifetime	50,000 h
Power supply (PSU)	110-240 VAC 50-60 Hz
Nb Power supply unit	1
Power supply dimensions	37 x 15 x 7 cm / 14 x 6 x 3 in
Power supply weight	5,7 kg / 12.5 lb
Power consumption	450 W
IP Protection	IP65
Noise level	Noiseless
Mesh network balloons	100 m (109 yd) between each pad



Light controls



- > via the **control panel**
- > Remotely via the **Airstar Light app**
- > **DMX**
 - DMX profiles available for major control surfaces
 - DMX connectors & **CRMX**

Airstar Light App

Control your balloons easily and remotely!



Control up to 250 balloons



8 light animations available



Packaging

Shock-proof wheel case
 Dimensions: 81 x 47 x 35 cm
 31 x 18 x 13 in
 Transport gross weight: 23 kg (50 lb)

Included accessories


Skirt, Stand mounting kit, DOP
 Choice SnapGrid (Optional)

Pad

Pad dimensions	190 x 130 x 15 cm / 6 x 4 x 0.6 ft
Volume	17.8 m ³ / 628.6 ft ³
Net weight of the pad	9 kg / 20 lb
Certifications	CE, IP65



Illumination

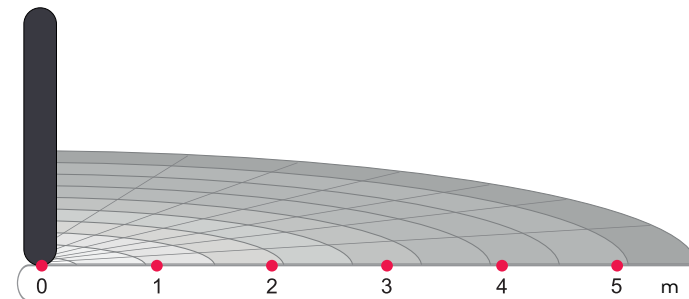

	0	1	2	3	4	5	
3200 K	1250	1250	338	125	67,3	38,7	lux
	116,1	116,1	31,4	11,6	6,2	3,6	fc
5600 K	1340	1340	362	136	74,2	42,8	lux
	124,5	124,5	33,6	12,6	6,9	4,0	fc