

Sirocco 300 ProPack

 **20,500 LUMEN**

 **2.3kg 5.0lb LIGHTWEIGHT**


 **5,000 K DAYLIGHT COLOR**

 **12 hrs**



Lighting data

Light Engine	Airstar LED Matrix : 4 x 5 125 lm
Maximum lumen	20,500 lm
Average LED life *	50,000 h
Colour temperature: daylight	5,000 K
CRI	70
Light under the balloon ** (2.2 m - 7.2 ft high)	345 lx - 32 fc

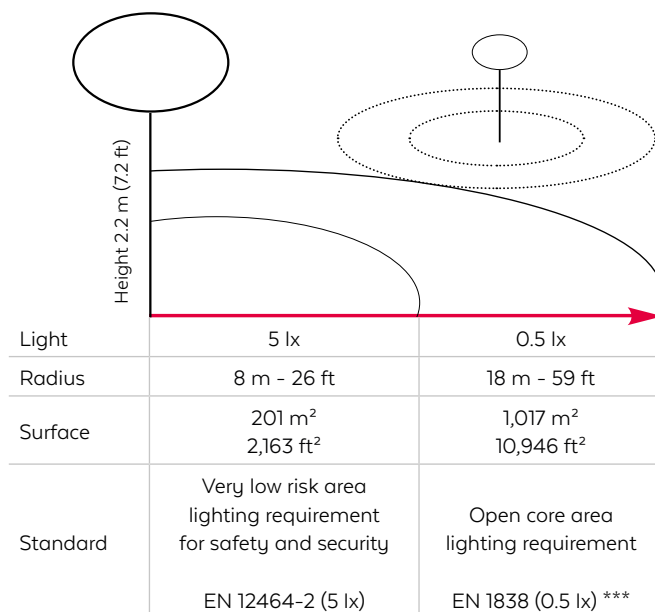


Technical data


Wind resistance of the balloon	80 km/h - 50 mph
Power consumption	160 W
Efficiency	138 lm/W 8,148 lm/kg - 3,728 lm/lb
Battery voltage	52 V
Mode	Full Efficient Eco
Battery life	4 h 6.5 h 12 h
Recommended battery	830 Wh (16 Ah) / 52 V
Certifications	IEC-60598-1, CE, IP54
Flame-retardant fabric	

Airstar Light App

Control your balloons easily and remotely!



 Control up to 250 balloons.
Max Mesh range between two balloons: up to 100 m - 109.3 yd

 4 light animations available



Weight and dimensions

Net weight of the balloon	2.3 kg - 5 lb
Envelope size	ø 60 cm / h 37 cm ø 23 in / h 15 in
Telescopic column	Up to 2,20 m (7.2 ft) Weight 1.6 kg (3.5 lb)

Packaging

Included in the transport case:

Full set lighting balloon with 1x standard envelope with telescopic column, 1x 52V battery, 1x battery charger, 1x quick-start guide, 1x envelope repair patch kit, 1x connecting cable

Transport case	67 x 51 x 26 cm (L*w*h) 26 x 20 x 10 in (L*w*h)
Transport gross weight	Less than 23 kg (50 lb)

Accessories & Main options

Envelope variants: Lenticular, reversed reflector, personalised with your logo, red top colour modifiable



* Under normal conditions of use ** Lenticular Envelope *** Standard Envelope